


## RS232 to Wiegand Dual Devices Converter (**AST-CV11**)

AST- RS232 to Wiegand Dual Devices converter is a dual reader interface for combine the RS232 (QRCode Reader) and Wiegand reader to a Wiegand output. It also provides 12V and 5V output for other devices interface.

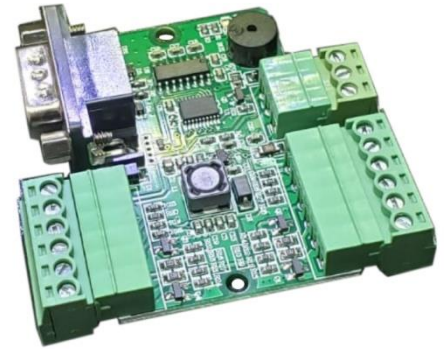

### Specifications

AST – RS232 to Wiegand Dual Devices Converter (AST-CV11)	
<b>Communication</b>	
RS232 Port	57600 bps (8, n,1)
Wiegand Input	24-128bits
Wiegand Output	24-128bits
<b>General</b>	
Power	12VDC / 50mA (Not include Reader)
Power for Readers	12V/1A & 12V/0.5A
Working Environment	-10°C to 50°C 10% to 90% RH
Dimensions	Board Size: 65mm x60mm x 20mm (H x W x D) Installation Area (120mmx60mm x25mm)